



Installation Guide




WIFI Range Extender
M0304464 Version1.0

1 Product Specification

This device can expand wifi signal from the living room to the study room, kitchen, washroom, balcony and so on and make wifi coverage all the corner.


This guide will introduce the internal and external antenna type COMFAST brand product to you. Pls realize it and refer to it based on the product type which you buy.

1.1 Internal Antenna Product Diagram



- ① Purple means the device is not connected. Blue means the device is connected with router and the signal is good. Orange means the device is connected with router and signal is not weak.
- ② Attention: Power on the device and use the needle to insert the RESET hole for 5-10 seconds and loose it. The device will restore to factory settings.

1.2 External Antenna Product Diagram

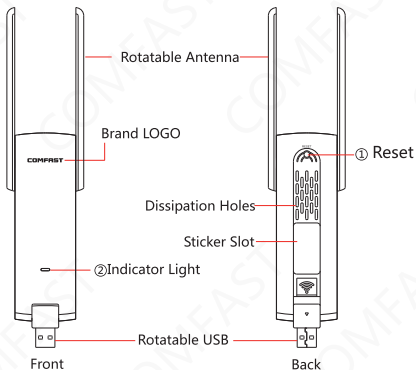


① Press on this button for 5-10 seconds and loose it. The device will restore to factory settings.

② Purple means the device is not connected. Blue means the device is connected with router and the signal is good. Orange means the device is connected with router and signal is not weak.

2 WiFi Signal Exp anding(R epeater) theory description


The coverage of wifi router in the market usually can not meet the family need. And the walls in the house greatly reduce the router WIFI' s coverage. So we need a wireless range extender to extend the signal from the router.

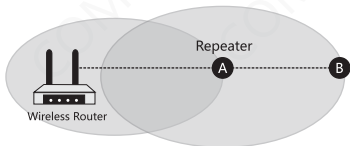


Attention: As it shown, if your router effective coverage is in A place, you can expand the signal to B place with using COMFAST brand repeater in A place.

3 Software Settings


3.1 Use mobile to connect wifi signal "COMFAST-XXXXXX" ; Open the browser and enter 192.168.10.1, then get into the login page. Choose defaulted language "English" and input defaulted password "admin" , and then click "login" to get into the setting page.




3.2 After login, the device will automatically scan the wireless signal which is available.



3.3 Choose available wifi signal and input "Pre-shared Key" and set "The Device SSID" if you want. click "Apply" and wait for few seconds to finish the settings. (Note: "Pre-shared Key" is same password as your router.)

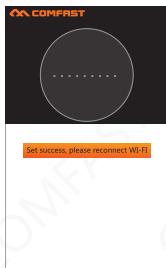

3.4 After finish the settings, pls restart the device. Then reconnect the wifi signal to get into the login page. If it shows as below, it will be set successfully.



Copyright information

Statement

Shenzhen Four Seas Global Link Network Technology Co.,Ltd.Company
all rights reserved.

Without ours official writ permission, no unit or individual shall be copied, reproduced, transcribed or translated in part or whole book. In any form or by any means(electronic,mechanical,printing,recording or other possible means)or for the propagation of goods any commercial, profitable purposes.

COMFAST is the registered trademark of Shenzhen Four Seas Global Link Network Technology Co.,Ltd.Company. All other trademarks or registered trademarks mentioned in this document, by respective owners.

Product specifications and information mentioned in this manual are for reference on subject to updates without notice. Unless there are other special agreed, this manual is used only as a user guide. All statements, information, etc. are not constitute any form of guarantee

Manufacturer: Shenzhen Four Seas Global Link Network Technology Co.,Ltd.Company
Address: Room 607-610,Block B Tao JINDI Electronic Business Incubation Base, Tenglong Road, Longhua District, Shenzhen, China
Hotline: 0755 83790059/83790659
Website: www.szcomfast.com